

ASTM D7169 (C9-C120) Standard on ZB-1XT SimDist 5x0.53x0.09, C10 - C120

Column: Zebtron[™] ZB-1XT SimDist Metal, GC Cap. Column 5 m x 0.53 mm x 0.09 µm, Ea

Phase: 100% Dimethylpolysiloxane

Dimensions: 5 meters x 0,53 mm x 0,09 µm

Order No: 7AK-G026-55

Oven Profile: 35 °C to 430 °C @ 9 °C/min for 10 min.

Carrier Gas: Constant Flow Helium, 34 mL/min


Injection: On-Column : 1 µL @ 38°C

Detection: Flame Ionization (FID) (450°C)

Analyst Note: This chromatogram has been baseline subtracted. Sample was D2887 calibration mix with PolyWAX 1000 in



Products used in this application:

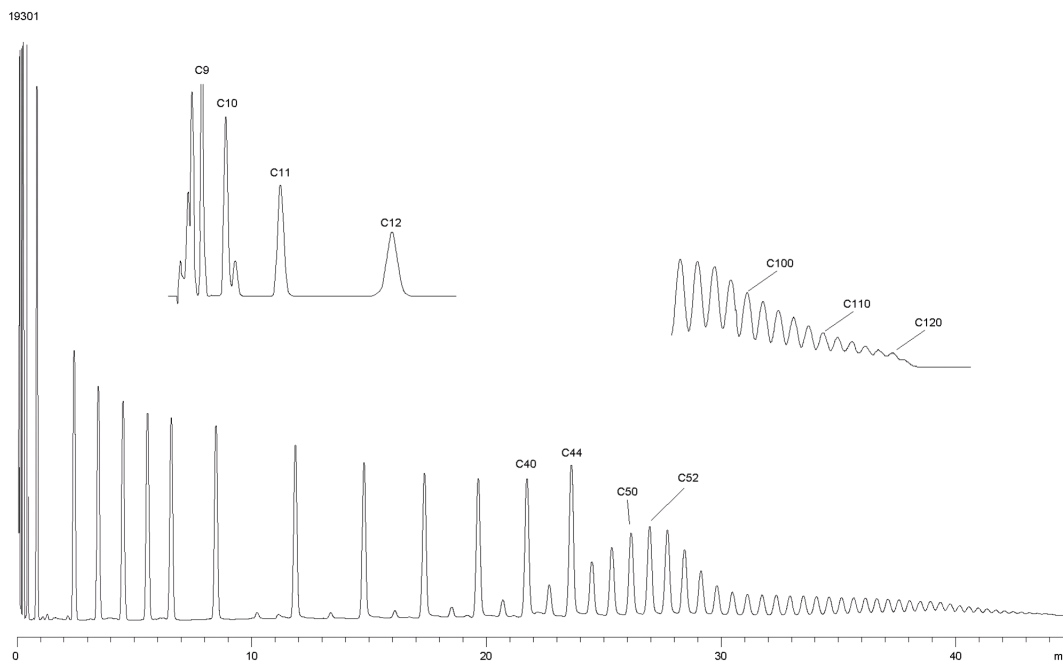

ASTM D7169 (C9-C120) Standard on ZB-1XT SimDist 5x0.53x0.09, C10 - C120

ANALYTES:

- 1 Decane (C10)
- 2 Undecane (C11)
- 3 Dodecane (C12)
- 4 Tetracontane (C40)
- 5 Tetratetracontane (C44)
- 6 Pentacontane (C50)
- 7 Dopentacontane (C52)
- 8 Hectane (C100)
- 9 Decahectane (C110)
- 10 Icosahectane (C120)

